

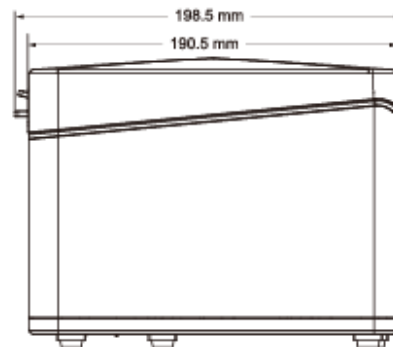



Thermal Receipt/ Kitchen Printer

PRP-350

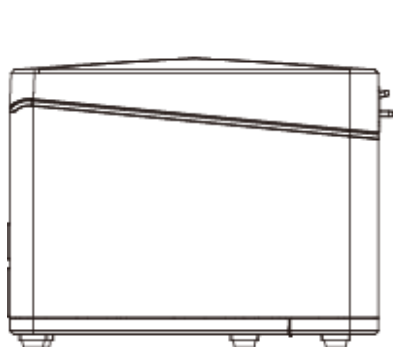

- Dimensions**

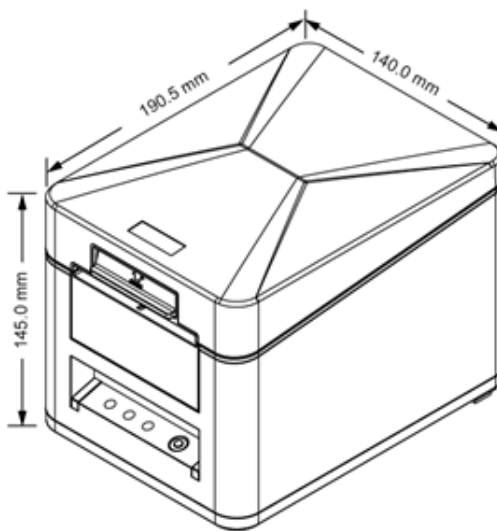

- Specifications

Model	PRP-350
General	
Print Method	Thermal line printing
Print Speed	250 mm/sec
Print Life	150 Km
Print Font (ASCII Mode)	ANK Font
	Font A: 12 x 24 dots
	Font B: 9 x 17 dots
Print Font (Graphic Font)	Chinese character: 24 x 24 dots
Print Resolution	576 dots/line or 512 dots/line
Print Font Character Support *	International Font, Big 5 Chinese, GB Chinese, Japanese, Korean selectable
Effective Print Width	72 mm
Driver	Win 2000 / Win 2003 / Win XP / Win Vista / Win 7
Print Command	Compatible with ESC/POS commands set
Auto Cutter	Partial
Paper End Detection	Yes
Over-Heat Halt-on Protection	Yes
Buffer	
Receipt Buffer	128K bytes
User-Defined Buffer	128K bytes
NV Flash Buffer	256K bytes
Interface	
Serial	1 x DB-9
Ethernet	1 x RJ-45
Cash Drawer	No
Others	
Power Input	+24VDC/2.5A (with External Adapter 100~240 VAC 50/60Hz)
Color	Black
Compliance	FCC / CE
Dimension (L x W x H: mm)	190.5 x 140 x 145.0
Weight	1620 g (with power adaptor)
Operating Temperature	5°C~45°C
Operating Humidity	10%~80% RH non-condensing
Storage Temperature	-10°C~50°C
Storage Humidity	10%~90% RH non-condensing

